
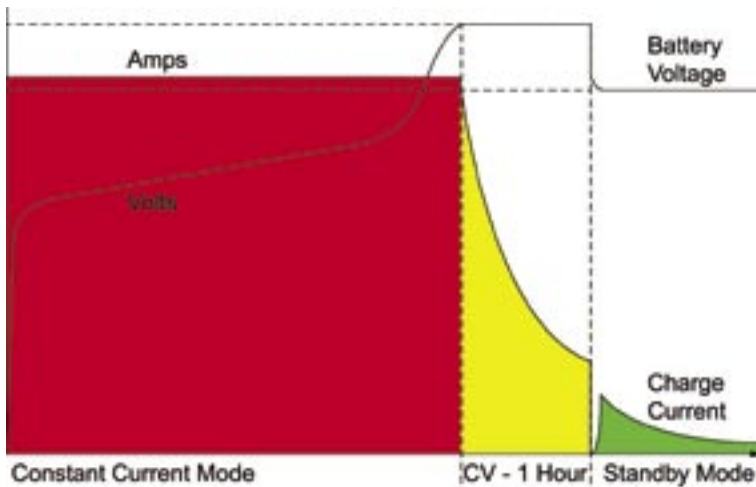


Features:-

- Switch mode
- Input voltage 220/240v 50Hz
- Output voltage 24v
- Output current 1.3A
- 3 stage charging
 - Constant current
 - Constant voltage
 - Float
- Timing control
- 3 LED status indication
- Reverse polarity protection
- Compact plastic housing
- Short circuit protection
- Light weight
- Cost effective

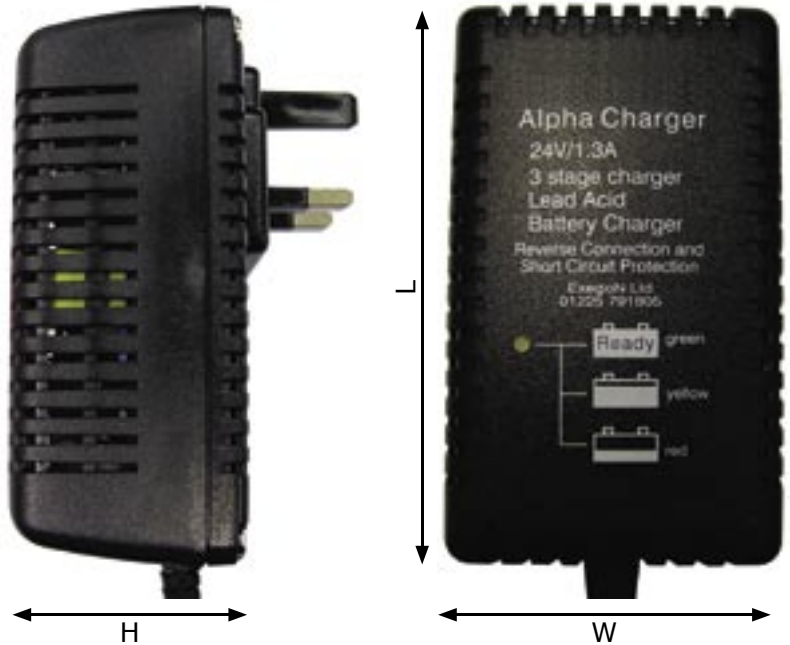

Options:-

- Input voltage 110/130v
- Output connector options
- Set for sealed lead acid
- European plug format

Applications:-

- Medical equipment
- Alarm systems
- Electrical standby
- Portable units

Model	Input Voltage	Output (Volt/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Alpha241.3	220/240v 50Hz	24v 1.3A	105 x 65 x 42	0.27	5.2Ah



Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC).



Exegon Ltd

Unit 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL

Tel: (01225) 791805 - Fax: (01225) 791629

Web: www.exegon.com - Email: sales@exegon.com