


# EXEGON PRO-DUTY

## MODEL DELTA2415 BATTERY CHARGER

### Features:-

- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240v 50Hz
- Output voltage 24v
- Output current 15A
- 3 stage charging, CC - CV - float
- Proportional timing,  $T/2 + 1hr$
- 3 LED status indication
- Reverse polarity protection
- Rugged steel case
- Short circuit protection
- Independent overrun timer
- Soft start current control
- Zero parasitic current
- Powder coated mild steel case

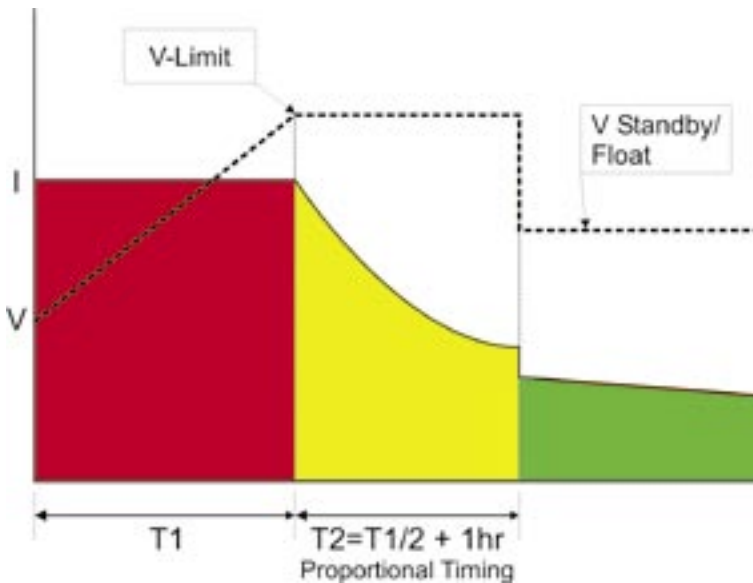

### Options:-

- Input voltage 110/130v
- Output connector options
- Set for various battery types:-  
Vented lead acid  
Sealed lead acid  
Gel or Lead calcium
- Temperature compensation
- Dual voltage with a manual switch
- 7 LED version, current ladder

**Applications** include:- robotics, golf buggies, wheelchairs and other electric vehicles

Model	Input Voltage	Output (Volt/Amps)	Dimensions (L x W x H mm)	Weight (Kg)	Minimum Battery Size
Delta2415	220/240v 50Hz	24v 15A	95 x 170 x 140	11.5	60Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.



**Exegon Ltd**  
Unit 1-3 Poulson's Yard, Strattons Walk, Melksham, Wiltshire, SN12 6JL  
Tel: (01225) 791805 - Fax: (01225) 791629  
Web: [www.exegon.com](http://www.exegon.com) - Email: [sales@exegon.com](mailto:sales@exegon.com)

